

U[⚡]power



Atlantis



1100
VA

ONEPOWER 1100X

Line-Interactive UPS

1100 VA

ONEPOWER 1100X

Line-Interactive UPS



La linea di prodotti OnePower è in grado di proteggere qualsiasi sistema elettrico o elettronico nel caso in cui si verifichi una variazione della tensione di alimentazione.

Le principali caratteristiche di questa linea di UPS sono:

- Microprocessore integrato
- Stabilizzazione del voltaggio in entrata grazie alla funzionalità AVR
- Tempo di intervento minore di 6ms
- Protezione contro il corto circuito ed il sovraccarico
- Batteria facilmente sostituibile

La facile installazione e l'uso intuitivo rendono tali prodotti adatti a qualsiasi utenza.

550
WATT

CPU

AVR



BATTERY
12V@9.0Ah

LINE INTERACTIVE


SPECIFICHE TECNICHE

POWER RATING (VA)	1100
POWER RATING (W)	550
INPUT	• Voltage: 162-268V • Frequency: 50Hz±5%
OUTPUT	• Voltage: 220V(±10%) [AC] / 220V(±10%) [INV] • Frequency: 50Hz (±1%) • AVR: Built-in • Waveform: Simulated SineWave
TRANSFER Line/Battery	Less than 2-6 ms (typical)
EFFICIENCY	Total Efficiency Over 80%
BATTERY	- Voltage: 12VDC - Capacity: 12V/9Ah - Quantity: 1 - Recharge Time: 4 hours to (90%) - Type: Sealed Maintenance Free Lead Acid VRLA Type
INDICATORS	1 LED: AC Mode (Green lighting), Battery mode (Green flashing every 10 seconds), Low Battery (Green flashing every seconds and)
PROTECTION	- Overload AC Buzzer sound every 0.5 seconds then UPS shuts down after 10 sec (>110%) - Overload Inverter UPS shuts down after 10 seconds (>110%) - Short Circuit INV Input Fuse & Electric Circuit - Short Circuit AC Electric Circuit - Battery Over-drain Two stages: Controlled Battery Low Warning & Cut Off - Spike Suppression Meets EN61000-4-5 - Noise Suppression Meets EN50991-1 - Modem RJ11
ALARM	• Battery Mode (sound every 10 seconds) • Low Battery (sound every seconds) • OverLoad (sound every 0.5 seconds) • Fault (continuously sounding)
CONNECTIONS	- Output 4xIEC (Battery Power Supplied)
BACKUP TIME	10 to 30 mins for typical PC Load
DIMENSIONS (WxHxD)	101 x 142 x 280 mm
NET WEIGHT	5 Kg (with Battery)
ENVIRONMENTS	• Temperature 0°-40° C • Humidity 0-95% (non-condensing)
CERTIFICATION	CE

PUNTI DI FORZA

- Microprocessor Based Design a tecnologia Line-Interactive
- Lo stabilizzatore di tensione multistadio integrato (AVR) garantisce ai carichi collegati un'alimentazione adeguata
- Tempo di intervento 2- 6ms
- Batteria (12V@9 A/h) per una lunga durata in assenza di rete elettrica
- Gestione avanzata delle Batterie ed estrema semplicità nella sostituzione
- Protezione Modem integrata

Backup Time (minute)	23'	14'	9'	7'	5'	2'30"
Power Rating (W)	115	170	240	300	360	480
Power Rating (VA)	230	340	480	720	720	960

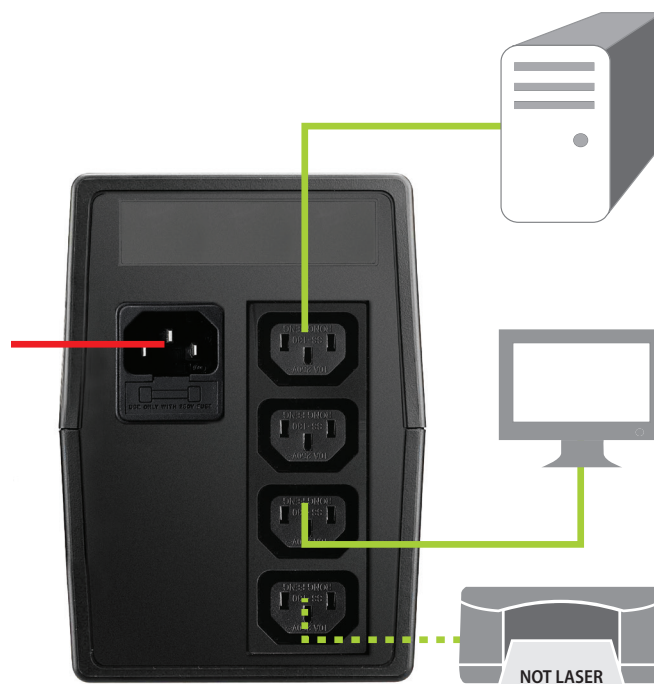

Backup Outlets

Surge

Main Power

UPS

Code: A03-PX1100

EAN: 8026974006659

IT Tutti i marchi riportati sono registrati ed appartengono ai rispettivi proprietari. Le specifiche riportate possono cambiare senza preavviso. Nessuna responsabilità per errori e/o omissioni.
EN All rights registered. Specifications are subject to change without prior notice. No liability for technical errors and/or omissions.



Atlantis
www.atlantis-land.com

1100 VA

ONEPOWER 1100X

Line-Interactive UPS



The OnePower UPS is able to protect every electric or electronic system in which could be a fast change of the supply-voltage. The main features of these UPS are:

- Microprocessor based
- Stabilization of the input voltage with AVR
- Transfer time less than 6ms
- Overload protection, Short Circuit protection
- Easy Swappable Battery

Atlantis Line Interactive UPS is easy to install and use.

550
WATT

CPU

AVR



BATTERY
12V@9.0Ah

LINE INTERACTIVE


TECHNICAL SPECIFICATIONS

POWER RATING (VA)	1100
POWER RATING (W)	550
INPUT	• Voltage: 162-268V • Frequency: 50Hz±5%
OUTPUT	• Voltage: 220V(±10%) [AC] / 220V(±10%) [INV] • Frequency: 50Hz (±1%) • AVR: Built-in • Waveform: Simulated SineWave
TRANSFER Line/Battery	Less than 2-6 ms (typical)
EFFICIENCY	Total Efficiency Over 80%
BATTERY	- Voltage: 12VDC - Capacity: 12V/9Ah - Quantity: 1 - Recharge Time: 4 hours to (90%) - Type: Sealed Maintenance Free Lead Acid VRLA Type
INDICATORS	1 LED: AC Mode (Green lighting), Battery mode (Green flashing every 10 seconds), Low Battery (Green flashing every seconds and)
PROTECTION	- Overload AC Buzzer sound every 0.5 seconds then UPS shuts down after 10 sec (>110%) - Overload Inverter UPS shuts down after 10 seconds (>110%) - Short Circuit INV Input Fuse & Electric Circuit - Short Circuit AC Electric Circuit - Battery Over-drain Two stages: Controlled Battery Low Warning & Cut Off - Spike Suppression Meets EN61000-4-5 - Noise Suppression Meets EN50991-1 - Modem RJ11
ALARM	• Battery Mode (sound every 10 seconds) • Low Battery (sound every seconds) • OverLoad (sound every 0.5 seconds) • Fault (continuously sounding)
CONNECTIONS	- Output 4xIEC (Battery Power Supplied)
BACKUP TIME	10 to 30 mins for typical PC Load
DIMENSIONS (WxHxD)	101 x 142 x 280 mm
NET WEIGHT	5 Kg (with Battery)
ENVIRONMENTS	• Temperature 0°-40° C • Humidity 0-95% (non-condensing)
CERTIFICATION	CE

PLUS


- Microprocessor Based Design Line Interactive Topology
- Wide input range application without using battery power (AVR)
- Transfer time 2-6ms
- Long time backup (battery 12V@9A/h)
- Advanced Battery Management & Easy Swappable Battery Function
- Modem Internet Protection

Backup Time (minute)	23'	14'	9'	7'	5'	2'30"
Power Rating (W)	115	170	240	300	360	480
Power Rating (VA)	230	340	480	720	720	960

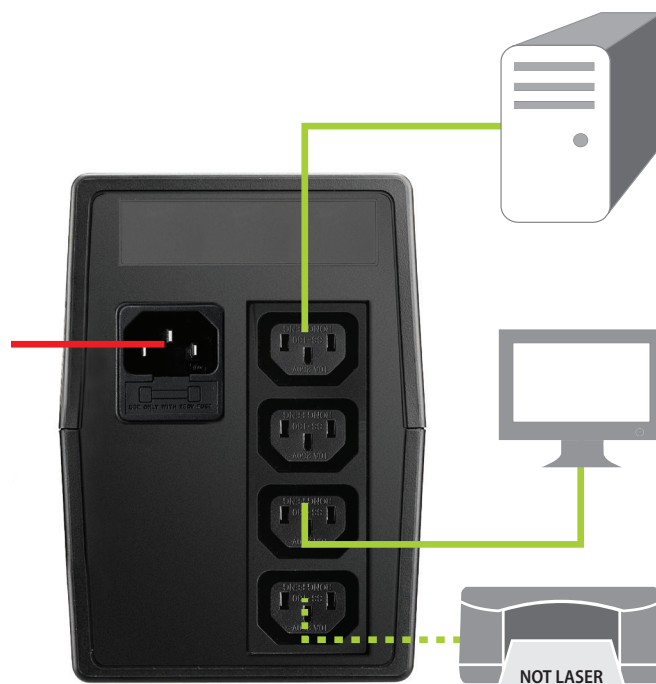

UPS
Code: A03-PX1100
EAN: 8026974006659

IT Tutti i marchi riportati sono registrati ed appartengono ai rispettivi proprietari. Le specifiche riportate possono cambiare senza preavviso. Nessuna responsabilità per errori e/o omissioni.
EN All rights registered. Specifications are subject to change without prior notice. No liability for technical errors and/or omissions.



Atlantis
www.atlantis-land.com